



XLite Configuration Instructions

Audience

This document is for clients of Simtex who are wishing to configure their SIP client from Xten. You will need to have downloaded a copy of XLITE from www.xten.com. XLITE is available for both PC or Mac free of charge.

Before we begin, you will need

- (i) Your Simtex Account Number and
- (ii) PIN

both of which are emailed to you when you sign up for an account.


To Configure your XLITE phone:

Click on


1. **Menu** (button on the right hand side of the word "clear" in the middle of the program)



2. "System Settings"

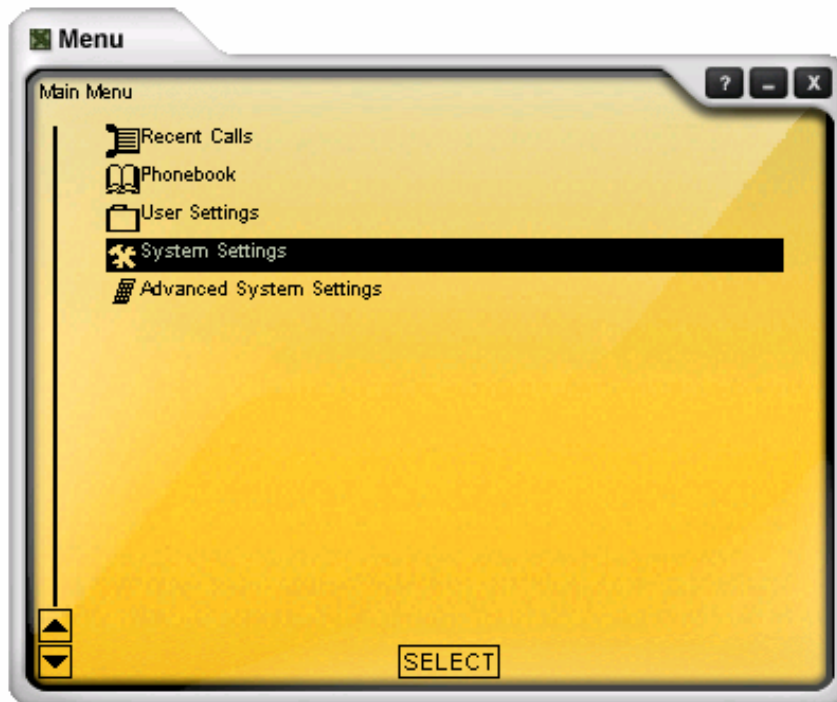


3. "SIP Proxy"

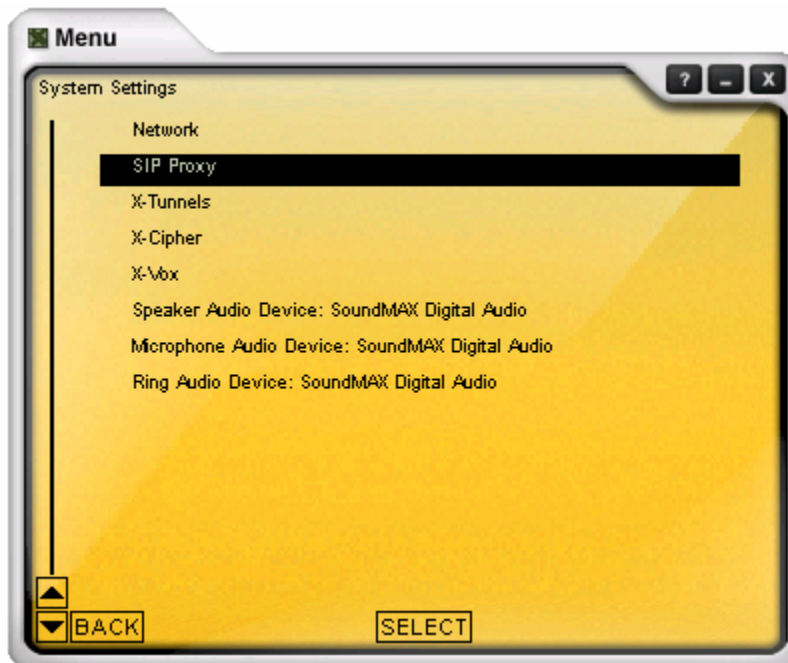



4. "Default"

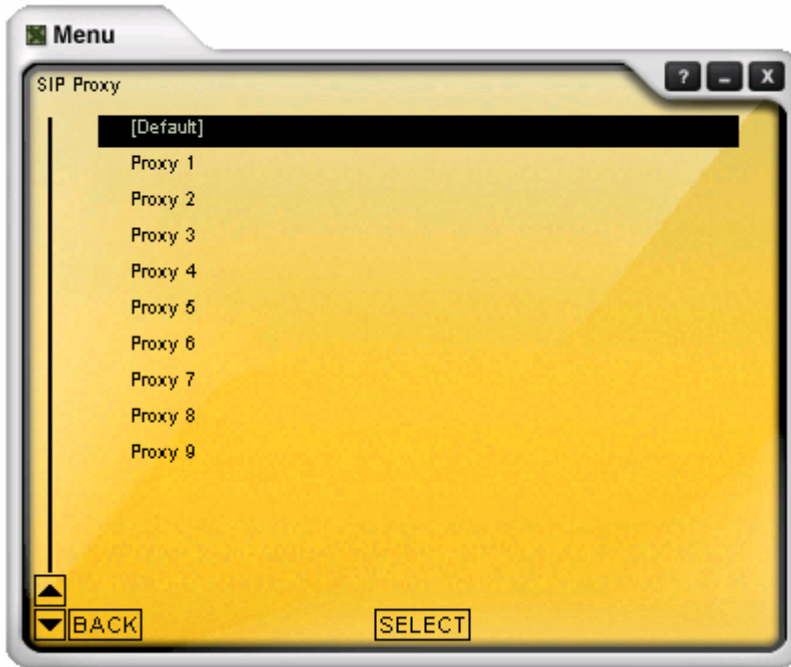



In this next section, there are a number of changes that need to be made to register your software. Change only the items listed below. Change the item by highlighting the area then pressing the Enter key.

Settings are as follows:

Enabled	Yes
Display Name	Type your name
Username	Your Simtex Account Number
Authorization User	Your Simtex Account Number
Password	Your Simtex PIN
Domain/ Realm	simtex.com.au
SIP Proxy	sip.simtex.com.au



Finally, close the program and restart it for the changes to take effect.

Congratulations, you are now ready to make calls.



If the voice quality is unclear, you may need to adjust the microphone settings. These are the two slider bars next to each other on the left hand side of the program. The far left bar should be approximately 1/3 up from its lowest point, with the red dot in the bar next to it approx 20% lower again. (Mac users will not have this second bar - If the dot does not appear for PC users, click on the microphone icon). Your program should look something like this:



Should you have any questions please email support@simtex.com.au remembering to include your account number.